




The
Patent
Office

PCT / G 000 102188
GB00
02188



INVESTOR IN PEOPLE

#7
PRIVATU
81622
DSS

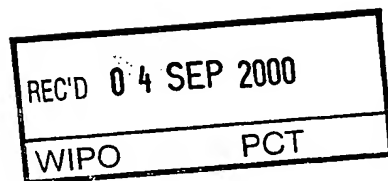

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

4
#7


28/12 10/018645

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

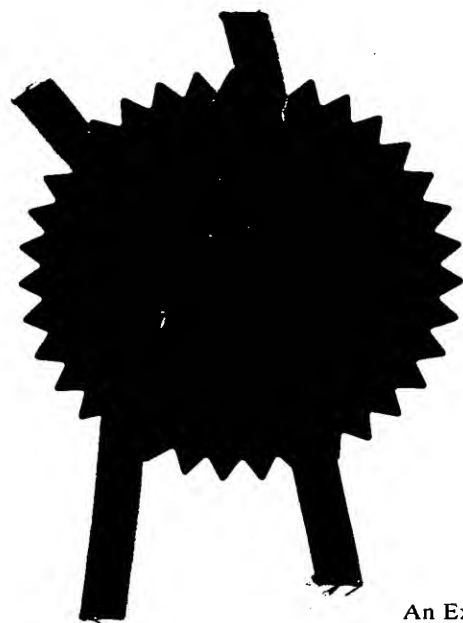

Signed

M. C. Enkiri

Dated

22 JUN 2000

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



The
Patent
Office



INVESTOR IN PEOPLE

GB9914280.4

By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of

MARCONI CASWELL LTD

One Bruton Street

LONDON

IX 8AQ

United Kingdom

Incorporated in the United Kingdom

[ADP No. 07806326001]

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference **P/61695.GBA**

2. Patent application number
(The Patent Office will fill in this part) **19 JUN 1999** **9914280.4**

3. Full name, address and postcode of the or of each applicant (underline all surnames)
Patents ADP number (if you know it) **MARCONI ELECTRONIC SYSTEMS LIMITED**
THE GROVE
WARREN LANE
STANMORE APPLICATION FILED 27.1.00.
MIDDLESEX HA7 4LY
SECTION 30 (1)(PACT)

If the applicant is a corporate body, give the country/state of its incorporation **UK**

4. Title of the invention **STEERABLE PHASED ARRAY ANTENNA**

5. Name of your agent (if you have one) **COLIN F. HOSTE**
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode) **GEC PATENT DEPARTMENT**
WATERHOUSE LANE
CHELMSFORD
ESSEX CM1 2QX

Patents ADP number (if you know it) **40527004**

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body
See note (d)) **YES**

STEERABLE PHASED ARRAY ANTENNA

The present invention relates to a steerable phased array antenna.

Electronically steerable phased array antennas are known and generally comprise an array of antennas each of which has an associated phase shifter which produces a
5 controllable phase shift in a beam transmitted by the array. A signal to be transmitted is split into a number of individual in-phase sub-signals, each of which passes through an individual phase shifter in which it is phase shifted before it is supplied to one of the antenna elements and transmitted therefrom. Transmission of all of the sub-signals produces an overall array output in the form of the beam. The beam can be steered
10 electronically by carefully selecting the phase shifts which are applied to the sub-signals.

For microwave applications, the phase shifters are typically fabricated in Gallium Arsenide (GaAs). There are a number of problems associated with the use of such solid state components. Typically a phase array antenna has an array of several thousand radiating elements requiring a correspondingly large number of phase shifters. Since
15 such phase shifters are expensive, this makes the entire array expensive. Furthermore, GaAs phase shifters are lossy, having a loss of typically -6 dB in the X band (8-12.4 GHz), and this leads to dissipation of power in the array. To compensate for these losses it is known to provide a gain element, typically one amplifier for each phase shifter. Even with this gain, it is only possible to compensate for relatively low power
20 losses, typically 20-30 dBm before non linearities caused by power compression occur. In addition, high power levels can cause permanent damage to conventional phase-shifters, so that ideally amplification should be provided downstream of the shifters.

Steerable phased array antennas are used to transmit radiation, particularly microwave radiation. In this context microwave radiation covers the range 0.247 GHz

to 100GHz and includes the Ka band (26.5 GHz to 40 GHz) and the millimetric band (30 GHz to 100 GHz).

According to a first aspect of the invention there is provided a phase-shifter comprising an actuator, which changes shape in response to an electrical control signal,
5 and a phase-altering means for introducing a phase shift into a signal whose phase is to be controlled, the phase-altering means being mechanically connected with the actuator such that the change in shape of the latter leads to a phase-altering action in the former.

Preferably the actuators comprise piezoelectric material. Alternatively they may comprise magnetostrictive material. Preferably, as the actuators change shape, they
10 force a piston to move.

The stator may be a piezoelectric tubular member having electrodes on the inside and outside, the piston may be also coaxially cylindrical and the bearing member may be elastically deformable and approximately annular in cross-section. The stator in use may be distorted in approximately frusto-conical manner, causing the bearing to roll
15 axially along the stator, this in turn causing the piston to move axially.

The phase-altering means may be a reflecting member inside a waveguide arrangement and attached to the piston, application of a control voltage to the stator electrodes causing the reflecting member to move, thereby altering a path length of a propagating signal. There may be two parallel and adjacent waveguides in the
20 waveguide arrangement, the first having a radiating element and the second having a radiating aperture, the radiating element, in use, propagating a signal towards the reflecting member which reflects the signal into the second waveguide, the signal exiting through the radiating aperture.

The phase-altering means may comprise a waveguide having one or more

dielectric slabs of a first dielectric constant fixed to the waveguide and the phase-altering means comprising a movable dielectric slab of a second dielectric constant disposed in co-operating relationship with the one or more fixed slabs, the movable slab being connected to the piston. The fixed slabs may be fixed to an inside surface of the

5 waveguide and define a laterally substantially central cavity free from dielectric material, the movable slab being arranged to move axially within this central cavity. The waveguide is preferably attached to one end of the stator and movable slab to the piston by means of a push-rod. There is preferably a launcher provided in the waveguide wall at a location not occupied by the fixed or movable slabs, the launcher serving to generate

10 a wave which passes through the slabs and out through a radiating aperture in the waveguide.

The piston may be hollow and the waveguide may be disposed in the piston. In this case the movable slab may be connected to the piston through connecting arms projecting radially inwardly from the piston and locating inside axially oriented slots

15 provided in the waveguide wall and in one or more of the fixed dielectric slabs.

The first dielectric constant may be approximately equal to the second dielectric constant.

The phase-altering means may comprise a dielectric gel contained within a waveguide. Preferably the dielectric gel is contained within a bag, an outer surface of

20 which is attached to an inner surface of a wall of the waveguide, and a transversely central end-portion of which is connected to the piston. The piston may be attached to the bag by way of a movable dielectric slab. The gel and slab may have approximately the same dielectric constant.

According to a second aspect of the invention, there is provided a steerable phased array antenna comprising an input to supply a signal to the array, a splitter to split the signal into a plurality of sub-signals and a plurality of antenna elements to transmit the sub-signals, the antenna elements having associated phase-shifting means
5 to phase-shift the sub-signals so that the array transmits the signal steered in a chosen direction, each of the phase-shifting means comprising a phase-shifter in accordance with the first aspect of the invention.

In like manner, in a third aspect the steerable phased array antenna is configured as a receiving array comprising a plurality of receiving antenna elements having
10 associated phase-shifting means to phase-shift the signals supplied by the antenna elements and a combiner connected to the phase-shifting means to combine the phase-shifted signals, wherein each of the phase-shifting means comprises a phase-shifter in accordance with the first aspect of the invention.

According to a fourth aspect of the invention, there is provided a tracking system
15 incorporating a phased array antenna according to the second aspect of the invention.

Preferably the array transmits microwave radiation. Most preferably it transmits radiation in the Ka band.

Embodiments of the invention will now be described by way of example only with reference to the accompanying drawings in which:

20 Figures 1(a) and 1(b) show a schematic illustration of a phased array antenna system in accordance with the invention in a transmit mode and a receive mode, respectively;

Figure 2 shows an actuator as employed in a phase-shifting arrangement in accordance with the invention;

Figure 3 shows various shapes adopted by a component part of the actuator;

Figure 4 illustrates a first embodiment of a phase-shifter according to the invention in two orthogonal views thereof;

Figures 5 and 6 are two orthogonal views of a second embodiment of a phase-shifter according to the invention in a first realisation thereof;

Figure 7 illustrates a second realisation of the second embodiment of a phase-shifter according to the invention in a general view;

Figure 8 is a cutaway view of the second realisation according to Figure 7;

Figure 9 is a cutaway view of the second realisation according to Figure 7 orthogonal to the view of Figure 8;

Figure 10 is the same view as Figure 9 but illustrating the displacement mechanism for the movable dielectric slab;

Figure 11 is a cutaway end-view of the second realisation according to Figure 7, and

Figure 12 shows a third embodiment of a phase-shifter according to the invention.

Figures 1a and 1b show a phased array antenna system in accordance with the invention, which is capable of full duplex operation. In Figure 1(a) a signal-processing unit 10 generates a normally sinusoidal signal of a given frequency which is amplified to a suitable level in a power amplifier 11, split as mentioned earlier in a splitter/combiner 12 into n sub-signals 13, these sub-signals 13 then being fed to respective phase-shifters 14 and thence to radiating elements 15.

In receive mode, the configuration is similar, except that individual low-noise amplifiers 16 are preferably provided for each sub-signal appearing at the output of the

phase-shifters 14, rather than a single common amplifier at the combiner output 17. The apparatus 12 which operated in transmit mode as a splitter now operates in receive mode as a combiner.

This arrangement is used to transmit microwave radiation having a frequency of, typically, 30 GHz and thus a wavelength of 10 mm. In the following description the dimensions and parameters which are given relate to such a frequency, though it will be appreciated by those skilled in the art that the invention is not limited to this frequency of operation.

Figure 2 shows an actuator arrangement 20 comprising a tube 22, a bearing 24 and a piston 26. It can be seen that both the tube and the piston are elongate and so have an axial direction which is parallel to their central axes and a radial direction perpendicular to the axial direction.

The tube 22 comprises a single piece of piezoelectric ceramic material. The wall 28 of the tube has a slot 30 extending completely through its thickness which describes a helical path about the tube from one end to the other. Since piezoelectric ceramic material is hard, the tube 22 is most conveniently provided with the slot 30 while in its green state before being fired. A suitable piezoelectric ceramic material is lead zirconate titanate (PZT).

The bearing is a resiliently deformable material, e.g. an elastomer, which may, in one realisation, have the shape of a toroid. If it is in the form of an O-ring having a circular cross-section, its thickness (in the radial direction) is arranged to be greater than the gap 32 between the piston and the tube. As a consequence, the bearing is stretched in the axial direction and squashed in the radial direction and in cross-section adopts a shape having two straight parallel sides and semi-circular ends, referred to as a "track"

shape. The bearing is in contact with both the piston 24 and the internal surface of the tube and part of its effect is to centre the piston in the tube.

Instead of a toroid, the bearing may be substantially "track-shaped" to begin with and may also be hollow, the internal space being filled with a resiliently deformable material, e.g. a gas under pressure or a light oil.

The piston can comprise any material which is stiff in at least the radial direction and, if it is required to transmit displacement in an axial direction, as in most embodiments of the phase-shifter according to the present invention, it should be stiff in that direction also. It can even be hollow, which enables a piston to be provided having very low inertia. An example of a suitable low-mass material is expanded foam plastic.

The tube 22 is provided with electrodes 23, 25 on its external and internal curved surfaces, respectively, so that an electric field can be applied through the thickness of the wall 28, thereby orientating dipoles in the material in a radial direction (that is, generally perpendicularly to the internal and external surfaces of the tube). In the configuration shown, both coatings are composed of a resistive material and contact rings 27, 29 and 31, 33 are made to bear against the ends of the outer and inner coatings, respectively. Rings 27 and 33 are connected together and likewise rings 29 and 31 and the resulting two connections form input terminals driven by a suitable power supply (not shown). The effect of this is to create voltage gradients along the axial length of the actuator tube, inside and outside the tube wall 28, the respective gradients being in opposite directions.

A similar effect can be created by employing low-resistance coatings, composed of, e.g., a metal such as silver or gold or a conducting PZT, splitting the helix halfway

along its length and driving the now highly conductive coatings in antiphase by a suitable interconnection of end-connections of the coatings.

The application of the operating electric field in the manner described causes the shape of the tube to change from having a constant diameter along its length to having
5 a flared or tapering shape extending from a relatively narrow end to a relatively wide end. This is due to the differently directed voltage gradients mentioned earlier. If an operating electric field having an opposite polarity is applied, the taper of the tube changes so that the end which was narrow becomes wide and vice-versa. Thus, switching an electric field from (a) a certain magnitude and polarity to (b) zero
10 magnitude and thence to (c) an equal magnitude and opposite polarity to that in (a) will produce the shapes shown in Figures 3(a), 3(b) and 3(c), respectively (shown exaggerated for clarity). The degree of shape change depends on the magnitude of the operating electric field applied.

The tube deformation just described forces the piston up and down the tube in
15 a manner shortly to be explained.

The degree of change of shape, and hence of movement, of the piston can be enhanced by careful choice of the structure of the wall of the tube 22. Compared to a single and integral piece of one ceramic such as PZT, greater movement for the same applied voltage can be obtained by giving the wall a multilayer structure, in which a
20 plurality of piezoelectric layers are provided, each having their own electrodes. Alternatively, lower driving voltages can be used to produce the same movement.

Alternative enhanced wall structures include a unimorph bender, in which the ceramic tube is bonded onto or inside a metal liner, and a bimorph bender, in which the tube comprises two piezoelectric tubes bonded together one inside the other, the tubes

being poled in opposite, preferably radial, directions. In both unimorph and bimorph
benders the enhanced movement is due to differential expansion occurring during
operation.

The use of PZT may provide, for example, a 10 mm displacement of the piston
5 in a response time of 25 ms. This may be under an operating voltage of 150 V for a tube
wall thickness of 21mm, although lower voltages could be used if a multi-layer tube was
provided having thinner individual layers of piezoelectric material. Other wall structures
can be used, as has already been mentioned.

As an operating electric field is applied to the tube, the internal diameter of the
10 tube decreases at one end and increases at the other and this causes a "rolling" motion
of the bearing which forces the piston toward the wider end of the tube. More precisely,
points of mutual contact between the bearing and wall on the one hand and between the
bearing and piston on the other do not move relative to each other except at the ends of
the bearing where the bearing material rolls away from/onto its respective contact
15 surface. Thus, in these end-regions, parts of the surface of the bearing either move into
contact with the piston or move out of contact with it and a similar effect occurs between
the surface of the bearing and the tube. The rolling action just described does not
involve sliding friction, rather the presence of static friction prevents relative motion of
the bearing and wall and of the bearing and piston.

20 It will be understood that, being based on a simple mechanical arrangement, the
actuators themselves are relatively inexpensive and allow a relatively inexpensive
steerable phased array to be produced by means of them in accordance with the
invention.

In producing a steerable phased array it is necessary for phase shifts of different

values to be applied to the subsignal radiation being transmitted by the individual radiating elements in order that a beam may be steered. At most, a relative phase shift of one wavelength is required between antennas in the array. This means that, for transmitted radiation having a wavelength of 10 mm, a maximum relative wavelength
5 shift of 10 mm is required.

The actuator arrangement 20 can induce a phase shift in transmitted radiation in a number of ways. In a first embodiment, illustrated in Figure 4, the actuator has a reflector 34 attached both to the piston 26 and to a cavity-separator extension piece 36 which extends axially of the reflector 34 and comprises a separating section 42 proper
10 and an aperture section 44 disposed between the separating section 42 and the reflector 34. A pair of waveguide sections 38, 40 having parallel longitudinal axes are divided one from the other by, firstly, a fixed separator member 46 and, secondly, the cavity-separator separating section 42. One waveguide section 40 is provided with a radiating element 48 at its distal end and the other waveguide section 38 has a radiating aperture
15 50 at its distal end. The proximal ends of both waveguide sections are attached in common to the wall 28 of the actuator arrangement 20.

The mode of operation of this embodiment is as follows. A signal is radiated from the radiating element 48 and propagates down the waveguide section 40 towards the reflector 34 which reflects it through the aperture 44 in the cavity separator 36 into
20 the adjacent waveguide section 38. When in the waveguide section 38, the signal is guided toward the radiating aperture 50. By moving the reflector by means of the PZT actuator arrangement 20, the path length between the radiating element 48 and the radiating aperture 50 is varied by an incremental amount, thereby modifying the phase of the signal leaving the radiating aperture 50. The reflector 34 and cavity separator 36

are moved linearly in the waveguide sections by the piston 36 that is moved by the squeezing action of the actuator.

In a second embodiment (see Figures 5 and 6) a single waveguide 54, which is likewise attached to the wall 28 of the actuator 20 at one end thereof, contains two fixed
 5 dielectric slabs 56 attached to opposite inside walls of the waveguide and a movable dielectric slab 58 attached by a rod 60 to the piston 26. The dielectric constant of the movable slab is approximately the same as that of the fixed slabs. The waveguide is provided with a launcher 62 which is received through an opening 64 in a side wall of the waveguide.

10 In operation, a signal is radiated from the launcher into the waveguide cavity. The signal propagates along the waveguide towards the fixed and movable dielectric slabs 56, 58 which modify the wavelength of the signal in proportion to the length of the overlap between the moving and fixed dielectric slabs. More precisely, the phase-shift in the radiated signal is expressed as:

$$15 \quad \Delta\phi = ((\beta_1 + \beta_3) - (\beta_2 + \beta_4)) \times x$$

where x = displacement of the movable slab from its fully overlapping position and β_n = propagation constant as seen by the wave as it travels from the launcher outwards. Looking at Figure 5, β_1 applies between the bottommost part of the fixed slabs 56 and the bottommost part of the movable slab 58; β_2 applies between the bottommost part of
 20 the movable slab and the topmost part of the fixed slabs; β_3 applies between the topmost part of the fixed slabs and the topmost part of the movable slab, and β_4 applies beyond that.

A variation of this embodiment is illustrated in Figures 7-11. In this variant realisation the mode of operation is exactly the same, but the construction is different.

Instead of the movable dielectric slab being coupled to the piston by means of a push rod 60 (Figures 5 and 6), it is directly attached to the piston through connecting arms 70. The connecting arms 70 pass through slots 71 in the waveguide 72 and fixed dielectric slabs 74 and are attached to the movable slab 76 at an intermediate point thereof along
5 its length. Thus in this realisation the actuator surrounds part of the waveguide 72 rather than being at one end of it, as in the Figure 5/6 realisation. As in the first realisation, though, the waveguide is secured to the actuator stator.

Figures 9 and 10 are views of Figure 8 from the side, like features being designated by like reference numerals. Figure 10 shows the slot 71 in the waveguide and
10 fixed dielectric slabs 74 and a connecting arm 70 in section which, in practice, connects the piston 73 and the movable slab 76. Either one slot only may be provided on one side of the waveguide and involving only one fixed slab, or two slots may be provided on opposite sides. The latter, balanced, arrangement is preferred for mechanical reasons. Figure 11 is a cutaway underside end-view of the second realisation of the second
15 embodiment and shows the actuator wall 28, the bearing 24, the piston 73, the waveguide 72, the launcher 62 and, inside the waveguide, the fixed slabs 74 and movable slab 76. The slot 71 made in the waveguide wall and in the fixed slabs 74 is also shown.

In a third, alternative, embodiment shown in Figure 12 the piston 26 is used to
20 drive, through a connecting rod 60, a movable dielectric slab 76 which is attached at its ends 82, 84 to a deformable bag 80 filled with a dielectric gel 86. The slab and gel both ideally have approximately the same dielectric constant. The bag 80 is secured on its outer face to inner, opposite wall-faces of the waveguide 54. In operation the piston moves the rod 60, which displaces the movable dielectric slab 76, which, in turn,

imposes a distortion in the shape of the bag 80. The effect is similar to that of the fixed/movable slab embodiment, wherein a change in the path length of the propagated signal associated with a particular propagation constant causes a phase-shift in that signal.

- 5 In all these embodiments and realisations the displacement of the piston needs to be in the region of one wavelength, that is about 10 mm for a 30 GHz signal, to produce a phase-shift equal to one wavelength.

 It should be noted that the helically slotted piezoelectric tube provides for large displacement in relation to its size. For an arrangement in which the bearing is located
10 at one end of the tube and is displaceable to the other end of the tube, the maximum possible displacement of the piston is the length of the tube. Of course, if the piston is located more towards the mid-point of the tube, the displacement would be less. This latter configuration provides a convenient way of achieving a type of "centre-zero" arrangement whereby in the piston's rest position (mid-position) the phase-shifter
15 corresponds to zero phase shift, but when the piston is driven to one side or other of its mid-position there is a positive or negative phase shift, respectively.

 By creating an array of independently controllable actuators/phase-shifters to form a suitable aperture, it is possible to steer a transmitted signal in space by varying the displacement of the actuator pistons relative to each other. In an embodiment
20 operating at 30 GHz having a hexagonal aperture of 0.5 m and a square array having an element spacing of half a wavelength, 7700 individual antennas are required. With a microwave reflector as described in the first embodiment (Figure 4) the rate of change of phase-shift $\delta\theta/\delta t$ of each element is about 28 deg ms⁻¹. With a dielectric-filled waveguide this rate of change is influenced by the phase velocity of the radiation within

the dielectric medium, as well as by the velocity of the dielectric piston. Assuming that the actuators can induce a relative phase shift of up to 360° between particular antennas, the array can track at least $\pm 45^\circ$ from boresight.

In order to ensure that grating lobes are not generated in "visible" space, the lateral spacing of the radiating elements in the array should be approximately half a wavelength, i.e. about 5 mm for radiation having a frequency of 30 GHz..

A significant benefit of the invention is that it enables phase shifting to be incorporated into the antenna. Indeed, it may be conveniently arranged for the end of the waveguide through which the radiation is exiting to constitute the radiating antenna itself, so that no additional discrete antenna element is required. Thus in this realisation the radiating aperture may be considered to constitute the actual antenna element. Alternatively, the waveguide may be coupled to its own discrete antenna element (not shown). The result is a low-cost phased array system compared with conventional systems which traditionally use large quantities of expensive active microwave components or a likewise costly complex mechanical arrangement. By incorporating phase-shifting into the antenna, a whole array can be fed directly from a single manifold, as illustrated in Figures 1(a) and 1(b) (see splitter/combiner 12). Furthermore, since the various phase-shifters described are able to withstand large amounts of RF power without damage, the manifold may be preceded by just a single high power microwave amplifier 11.

Although the array has a relatively fast response time, it is not as fast as pure solid state electronically scanned arrays. Nevertheless, the scanning rate of these arrays is certainly fast enough to be used as an antenna arrangement in satellite tracking. It is also fast enough to be used in numerous communications applications where switching

of a transmitting or receiving direction is required, such as OTM (on the move) Communications for HMMWV (high-mobility multi-wheeled vehicle) and UAV (unmanned airborne vehicles).

CLAIMS

1. A phase-shifter comprising an actuator, which changes shape in response to an electrical control signal, and a phase-altering means for introducing a phase shift into a signal whose phase is to be controlled, the phase-altering means being mechanically
5 connected with the actuator such that the change in shape of the latter leads to a phase-altering action in the former.
2. Phase-shifter as claimed in Claim 1, wherein the actuator comprises a piezoelectric or magnetostrictive stator, the phase-altering means comprises a piston and
10 a bearing member is provided disposed between the stator and piston.
3. Phase-shifter as claimed in Claim 2, wherein the stator is constituted by a piezoelectric tubular member having an electrode structure on both sides for coupling to a source of control voltage, the piston is a cylindrical member co-axially disposed
15 within the stator and the bearing member is an elastically deformable member of approximately annular cross-section, the stator during application of said control voltage becoming distorted in an approximately frustro-conical manner and thereby causing the bearing member to roll axially along the stator, the movement of the bearing member in turn causing axial movement of the piston.
- 20 4. Phase-shifter as claimed in Claim 3, wherein the phase-altering means comprises a reflecting member attached to the piston, the reflecting member being disposed inside a waveguide arrangement, whereby application of a control voltage to the actuator causes the reflecting member to move inside the waveguide arrangement, thereby

altering a path length of a signal propagated along the waveguide arrangement.

5. Phase-shifter as claimed in Claim 4, wherein the waveguide arrangement comprises first and second parallel waveguides, the waveguide cavities communicating
5 with each other over at least a part of their common length, the first waveguide containing a radiating element for producing radiation to be propagated along the first waveguide toward the reflecting member, wherein, in use, radiation propagating in the first waveguide is reflected from the reflecting member into the second waveguide and out through a radiating aperture in the second waveguide.

10

6. Phase-shifter as claimed in Claim 2 or Claim 3, wherein the phase-shifter comprises a waveguide containing one or more dielectric slabs made of a material of a first dielectric constant fixed to the waveguide and the phase-altering means comprises a movable dielectric slab made of a material of a second dielectric constant disposed in
15 co-operating relationship with the one or more fixed slabs, the movable slab being connected to the piston.

7. Phase-shifter as claimed in Claim 6, wherein the one or more fixed slabs are secured to an inside surface of the waveguide wall and define a laterally substantially
20 central cavity free from dielectric material, and wherein the movable slab is arranged to be axially movable within said substantially central cavity.

8. Phase-shifter as claimed in Claim 7, wherein the waveguide is attached to one end of the actuator stator and the movable dielectric slab is connected to the piston by

means of a push rod.

9. Phase-shifter as claimed in Claim 7, wherein the piston is hollow and the waveguide is disposed in the piston.

5

10. Phase-shifter as claimed in Claim 9, wherein the movable dielectric slab is connected to the piston by means of connecting arms projecting radially inwardly from the piston and locating inside axially oriented slots provided in the waveguide wall and in one or more of the fixed dielectric slabs.

10

11. Phase-shifter as claimed in any one of Claims 6 to 10, wherein a launcher is provided in the waveguide wall at a location not occupied by the fixed or movable dielectric slabs, the launcher serving to generate a wave which passes through the slabs and out through a radiating aperture of the waveguide.

15

12. Phase-shifter as claimed in any one of Claims 6 to 11, wherein said first dielectric constant is approximately the same as said second dielectric constant.

13. Phase-shifter as claimed in Claim 2 or Claim 3, wherein the phase-altering means
20 comprises a dielectric gel contained within a waveguide.

14. Phase-shifter as claimed in Claim 13, wherein the dielectric gel is contained within a bag, an outer surface of which is attached to an inner surface of a wall of the waveguide, and a transversely central end-portion of which is connected to the piston.

15. Phase-shifter as claimed in Claim 14, wherein the piston is attached to the bag by way of a movable dielectric slab.

16. Phase-shifter as claimed in Claim 15, wherein the movable slab and the gel have
5 approximately the same dielectric constant.

17. A steerable phased array antenna, comprising an input to supply a signal to the array, a splitter to split the signal into a plurality of sub-signals and a plurality of antenna elements to transmit the sub-signals, the antenna elements having associated phase-
10 shifting means to phase-shift the sub-signals so that the array transmits the signal steered in a chosen direction, each of the phase-shifting means comprising a phase-shifter as claimed in any one of Claims 1 to 16.

18. Antenna as claimed in Claim 17, comprising a power amplifier connected
15 between the input supplying the signal to the array and the splitter.

19. A steerable phased array antenna comprising a plurality of receiving antenna elements having associated phase-shifting means to phase-shift the signals supplied by the antenna elements and a combiner connected to the phase-shifting means to combine
20 the phase-shifted signals, wherein each of the phase-shifting means comprises a phase-shifter as claimed in any one of Claims 1 to 16.

20. Antenna as claimed in Claim 19, comprising a plurality of amplifiers connected between respective phase-shifting means and the combiner.

21. Antenna as claimed in Claim 20, wherein the amplifiers are low-noise amplifiers.
22. Phase-shifter substantially as shown in, or as hereinbefore described with reference to, Figures 2 and 4, or Figures 2, 5 and 6, or Figures 2, 7, 8, 9, 10 and 11, or
5 Figures 2 and 12 of the drawings.
23. Steerable phased array antenna substantially as shown in, or as hereinbefore described with reference to, Figures 1a and 1b in association with Figures 2 and 4, or Figures 2, 5 and 6, or Figures 2, 7, 8, 9, 10 and 11, or Figures 2 and 12 of the drawings.

ABSTRACTSTEERABLE PHASED ARRAY ANTENNA

A steerable phased array antenna has a plurality of antenna elements each having an associated phase-shifter. The phase-shifters have actuators which change shape in response to electrical signals and in so doing cause either a path length of signals to be radiated from the antenna elements to change or a propagation constant of a transmitting medium to change, thereby introducing a phase shift into the respective signal. The actuators may be magnetostrictive or, preferably, piezoelectric. Embodiments of the invention comprise a waveguide reflective arrangement in which the change of shape of the actuator moves a reflector in the signal path, and two separate realisations of an arrangement involving the use of fixed and movable dielectric slabs within a waveguide, the actuator producing movement of the movable slab between the fixed. In a further embodiment a deformable bag filled with a dielectric gel is used to produce the phase-shift.

15 Figure 4

1/11

FIG. 10 TO BE AMENDED

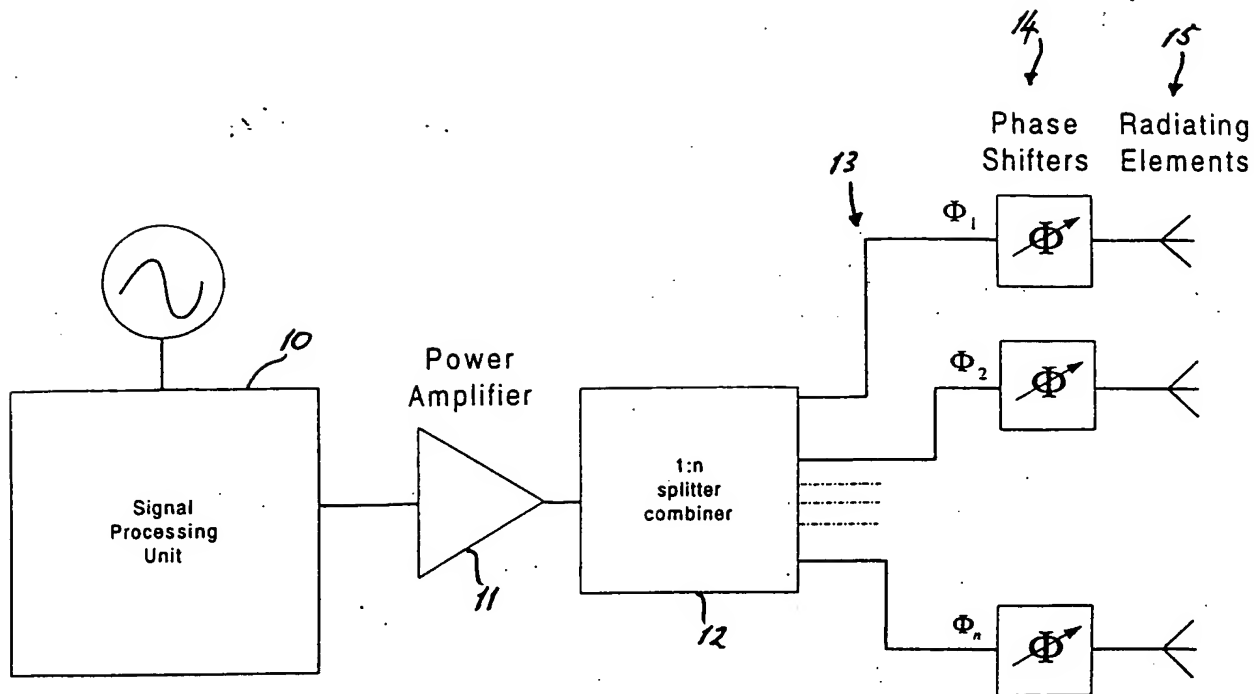


Figure 1(a)

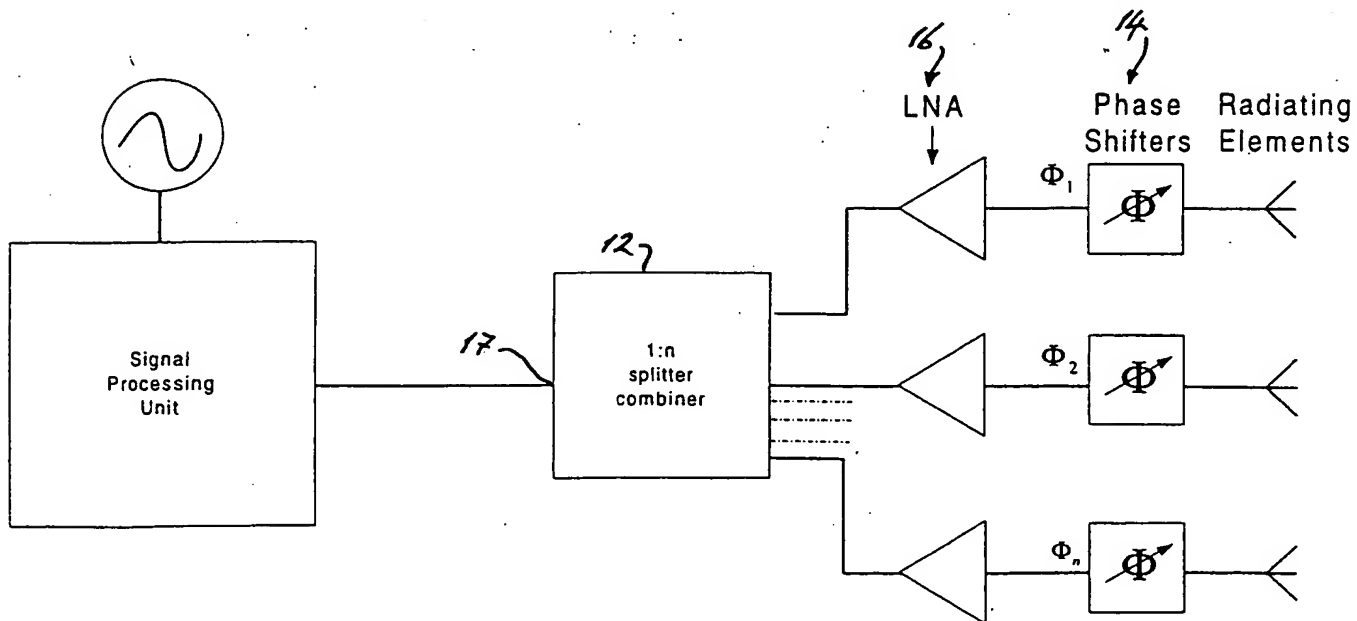


Figure 1(b)

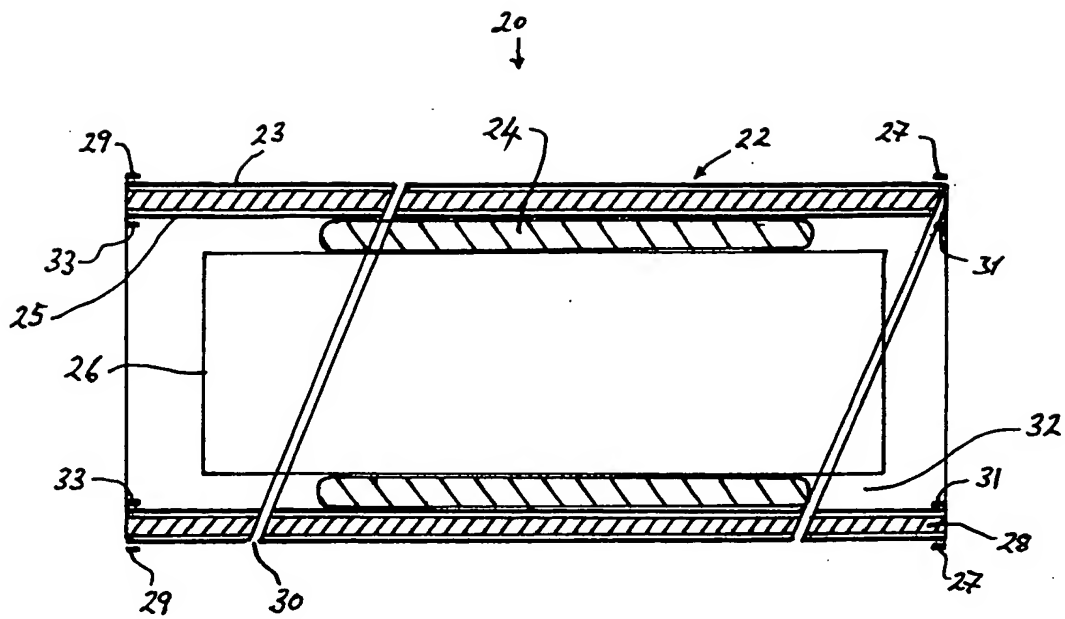


Figure 2




Figure 3(a)




Figure 3(b)




Figure 3(c)

3/11.

NOT TO BE AMENDED

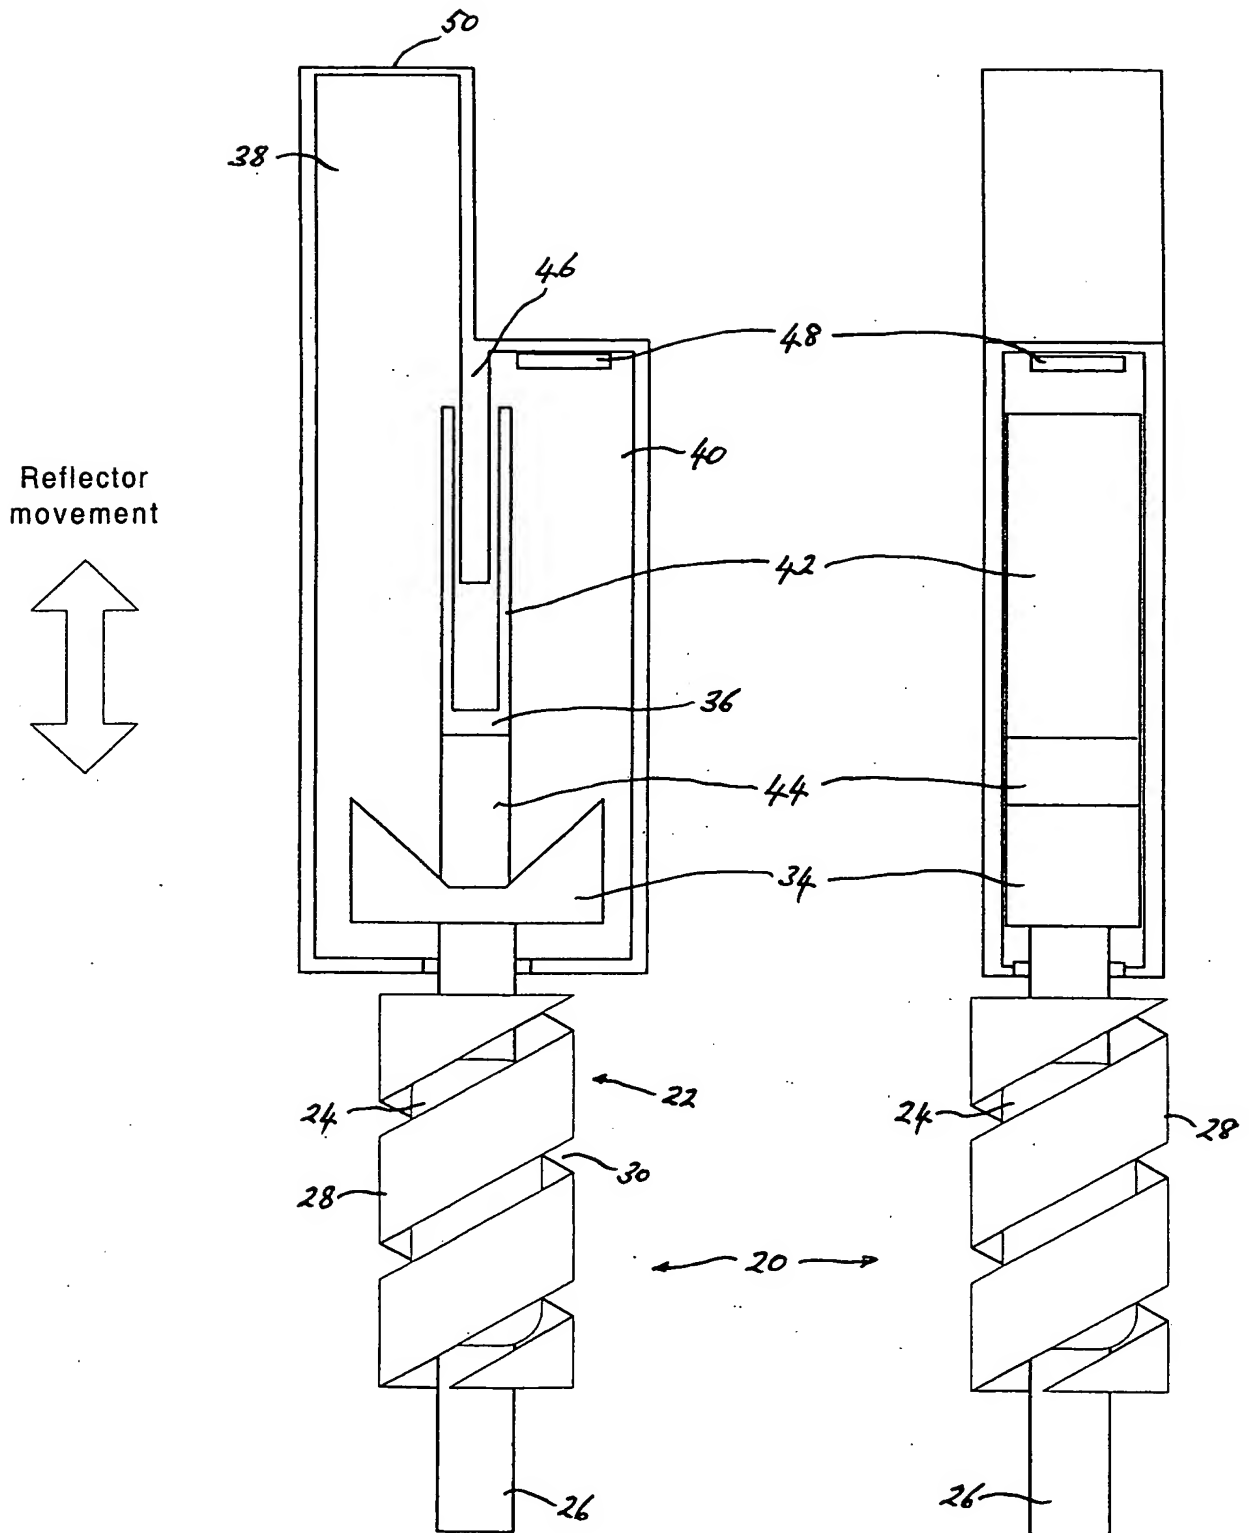


Figure 4

4/11

FIG. 5 TO BE AMENDED

Movement of dielectric slab

Figure 5

5/11

FIG. 1 TO BE AMENDED

Movement of dielectric
slab

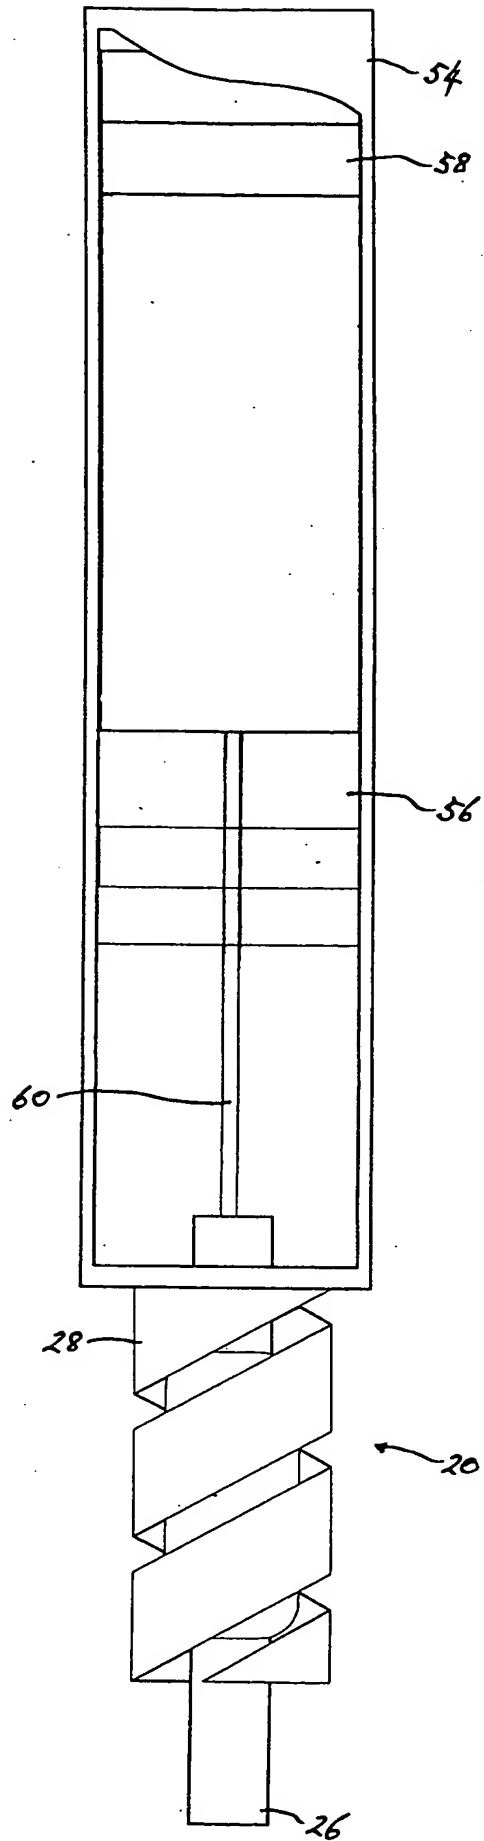



Figure 6

6/11

DO NOT BE ATTEMPTED

Movement of
dielectric slab

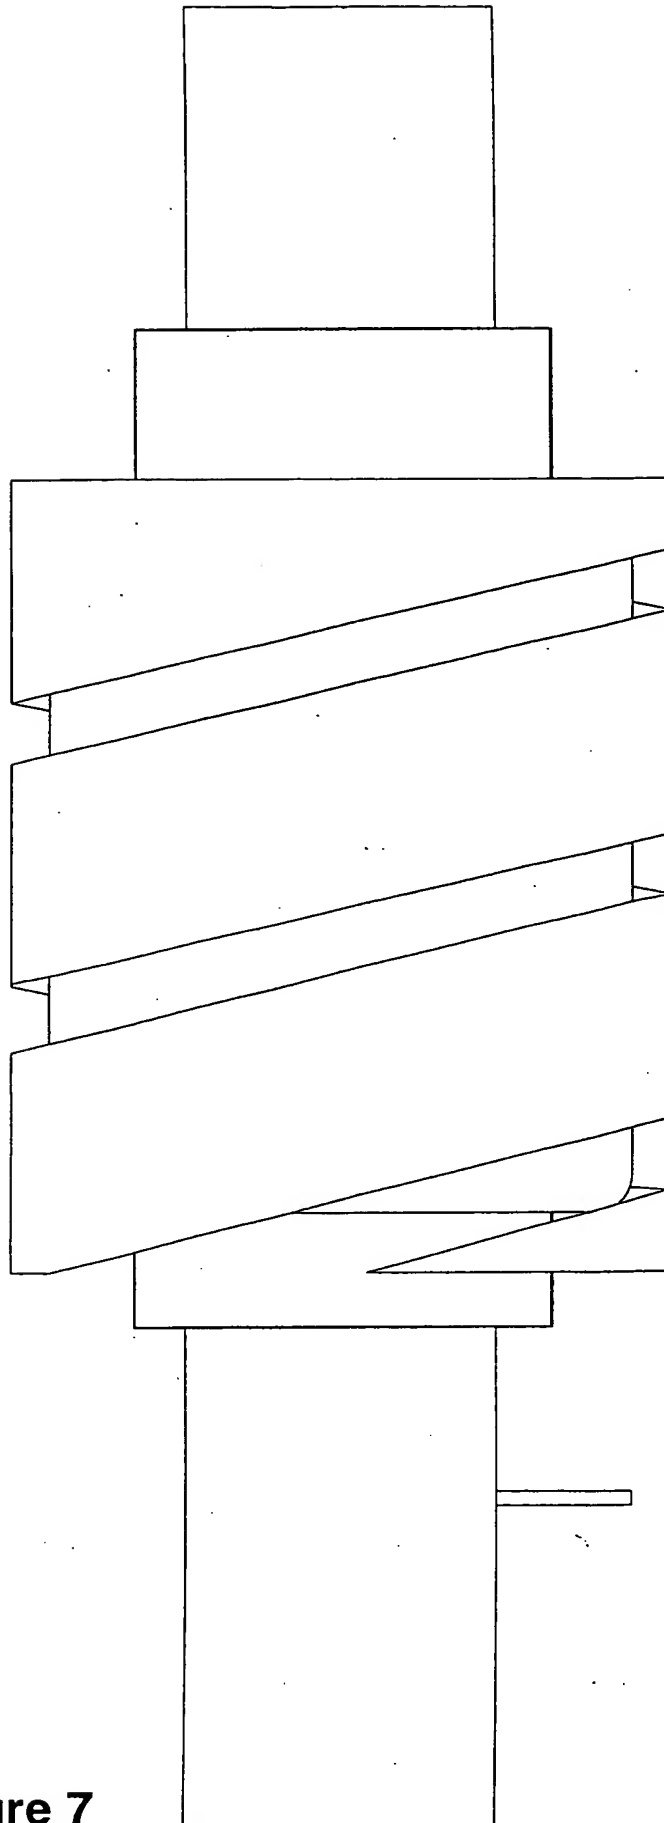



Figure 7

7(11)

FIG. 10 OF APPLICATION

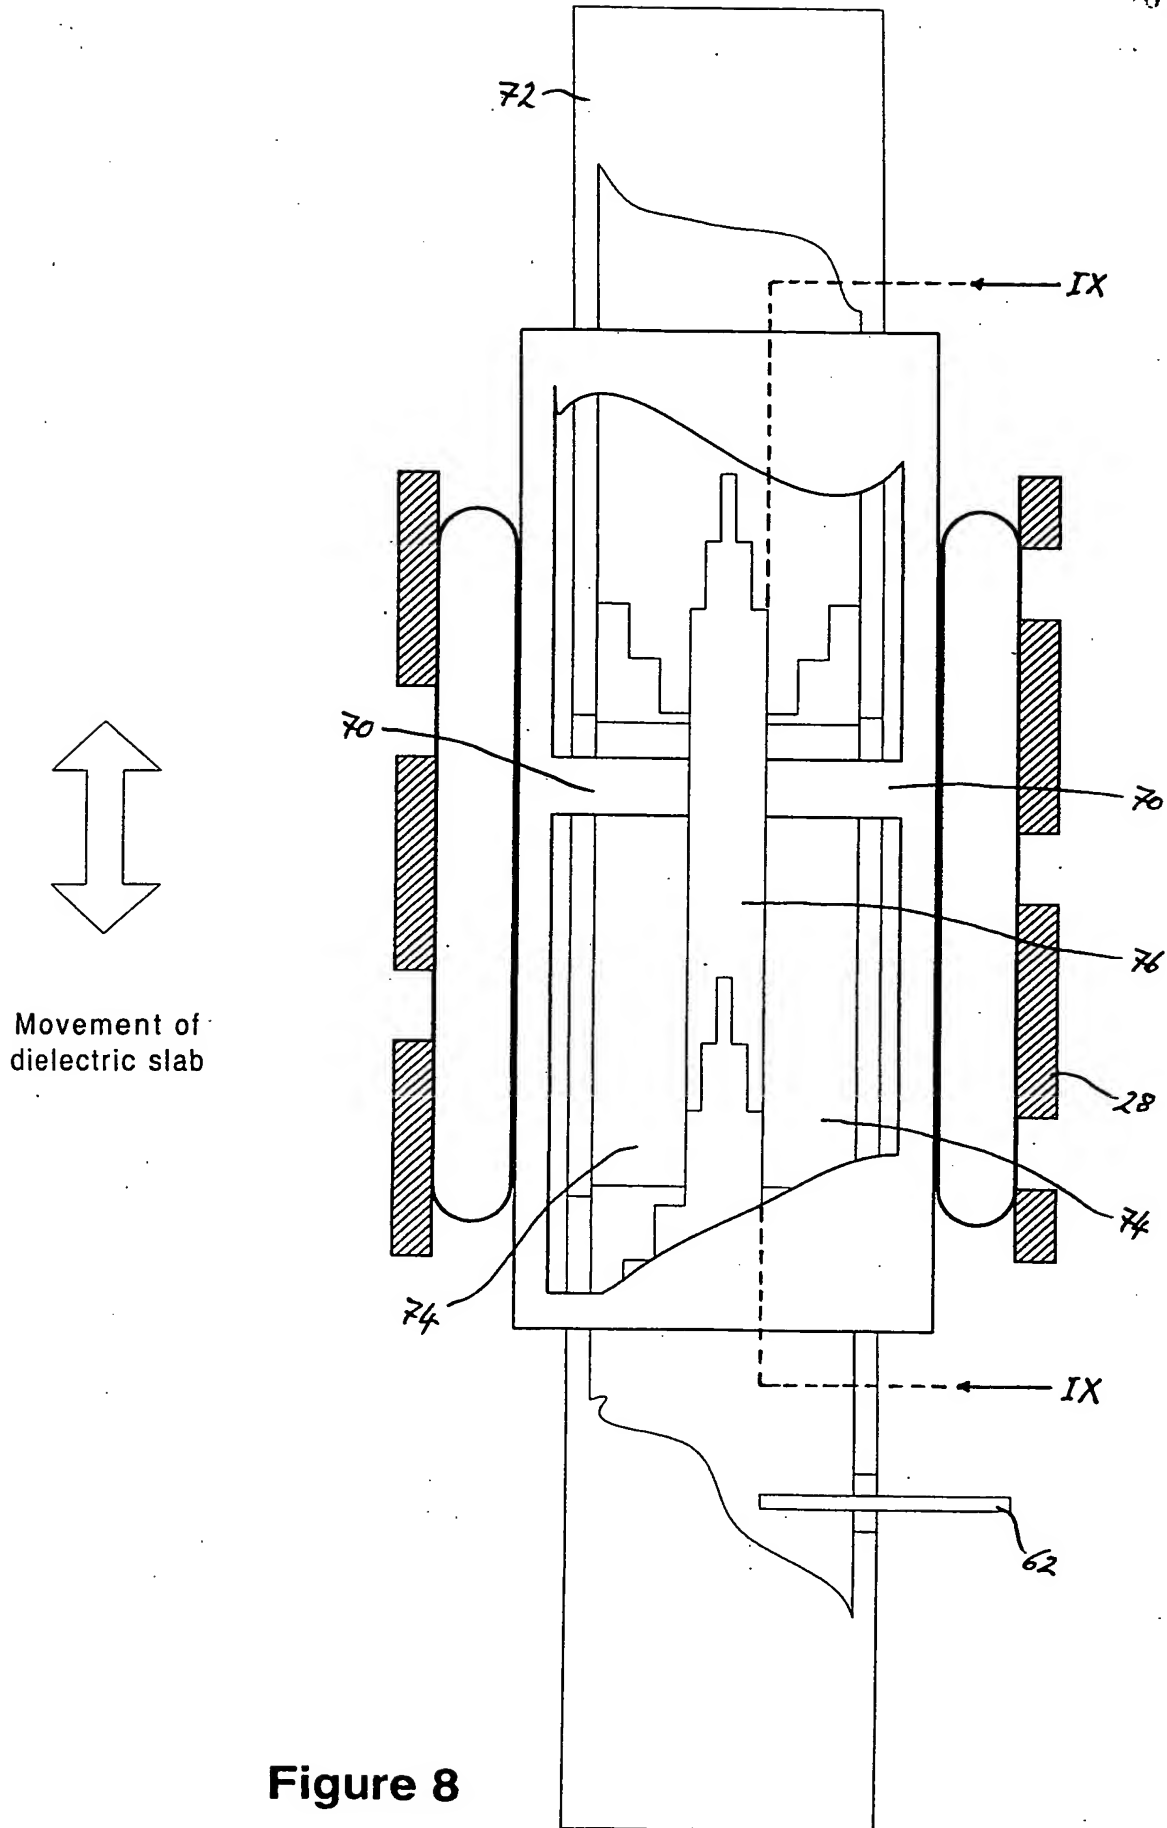


Figure 8

8/11

NOT TO BE AMENDED

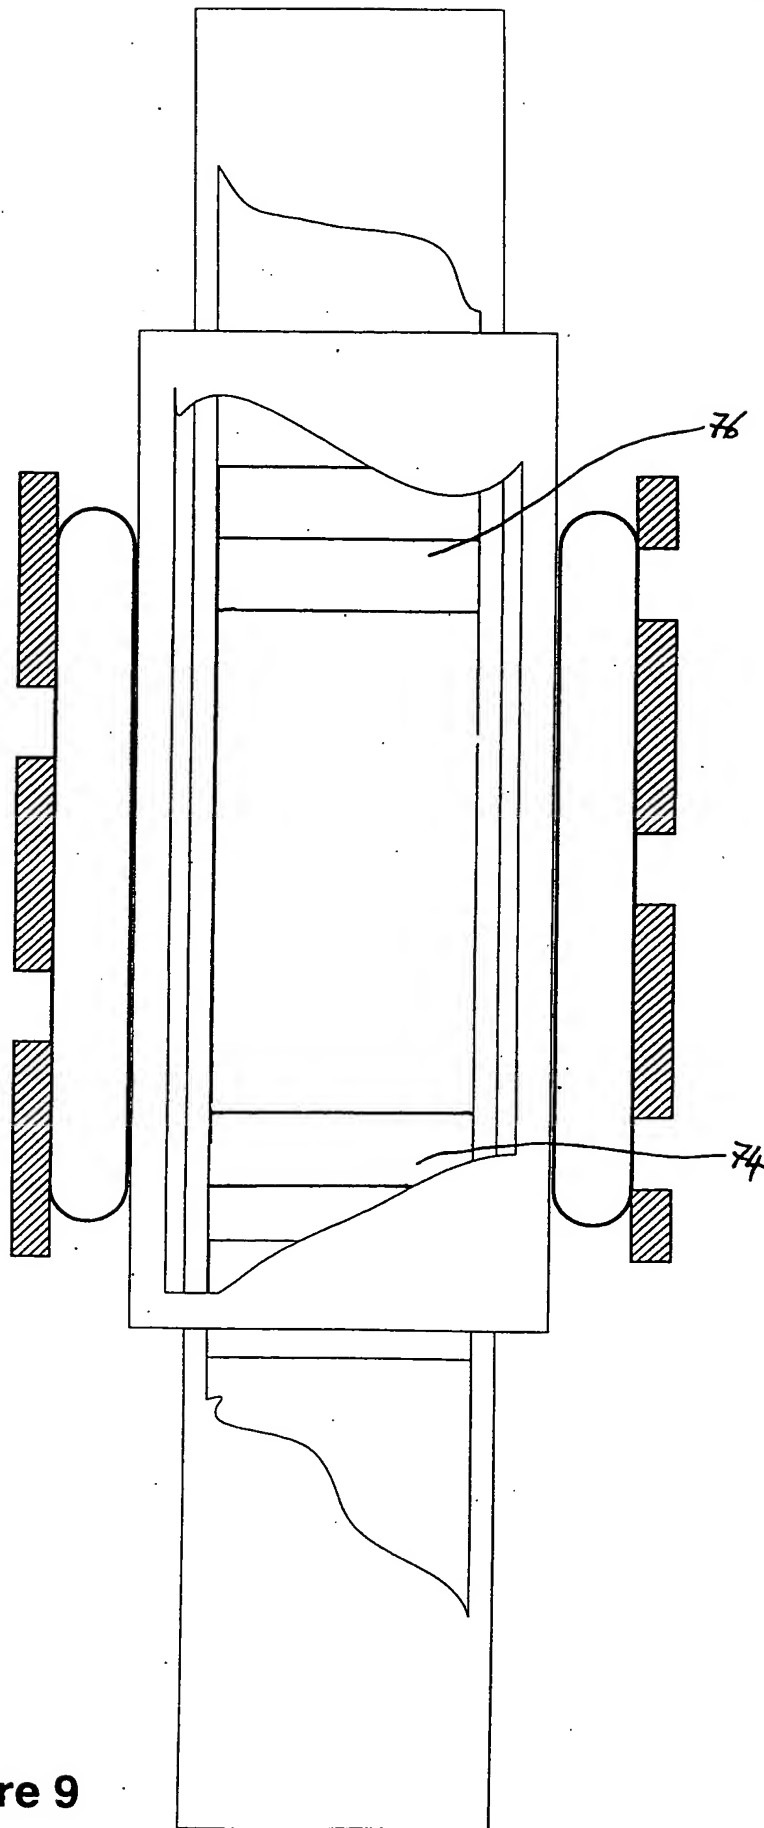


Figure 9

9/11

NOT TO BE AMENDED

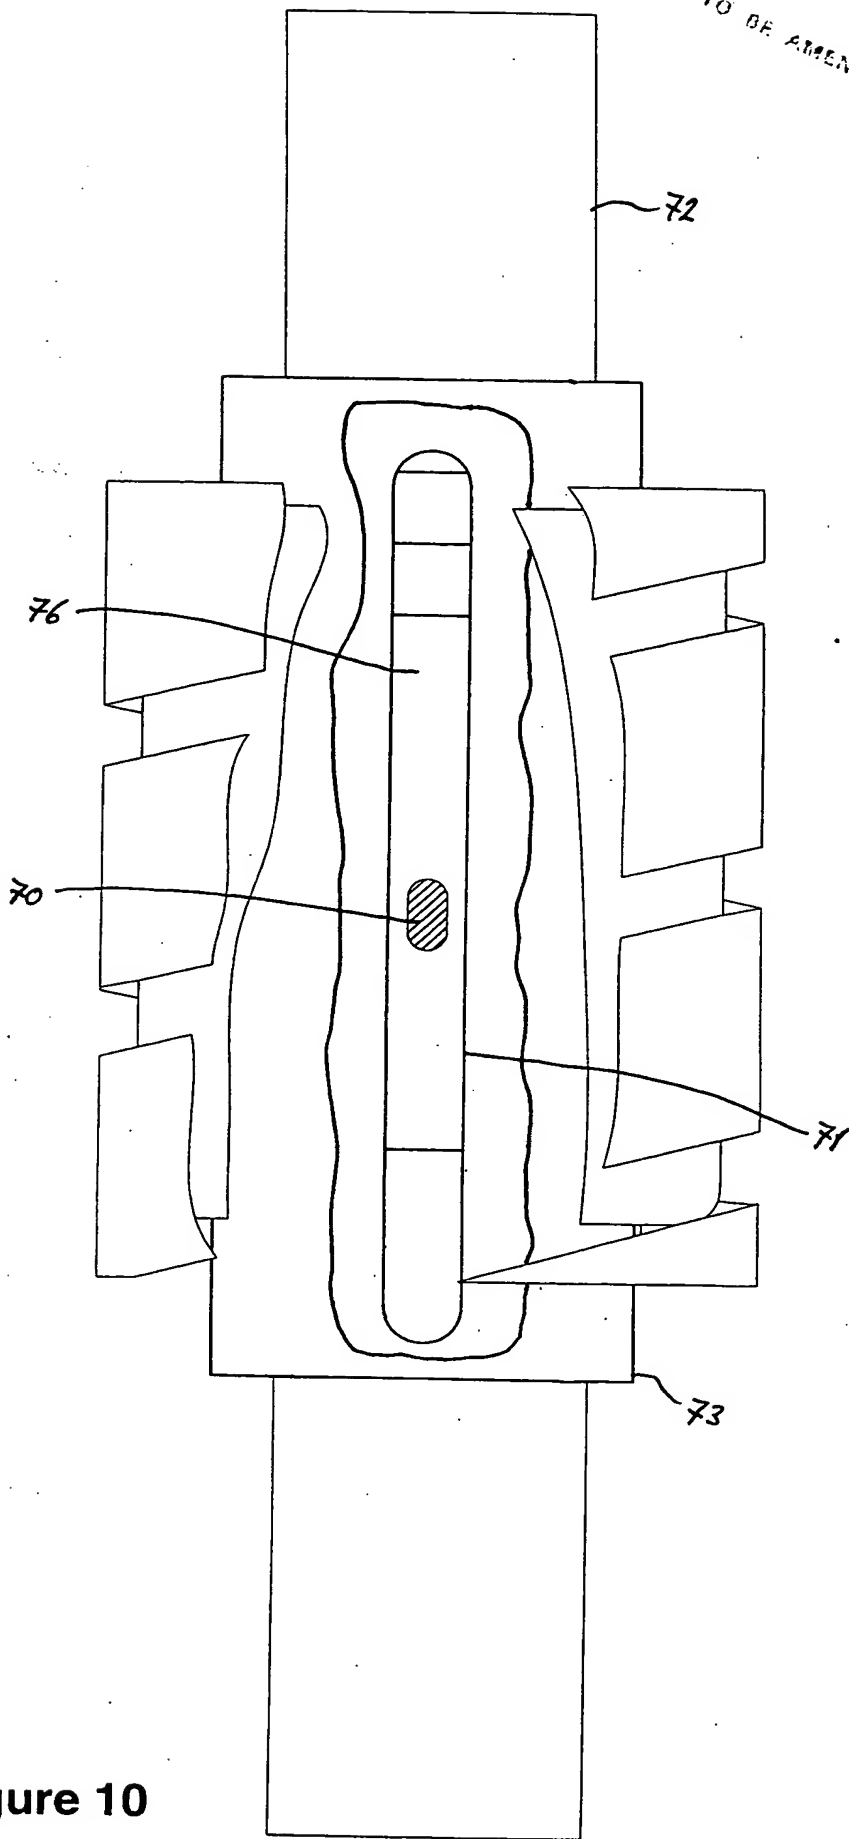


Figure 10

10/11

NOT TO BE REPRODUCED

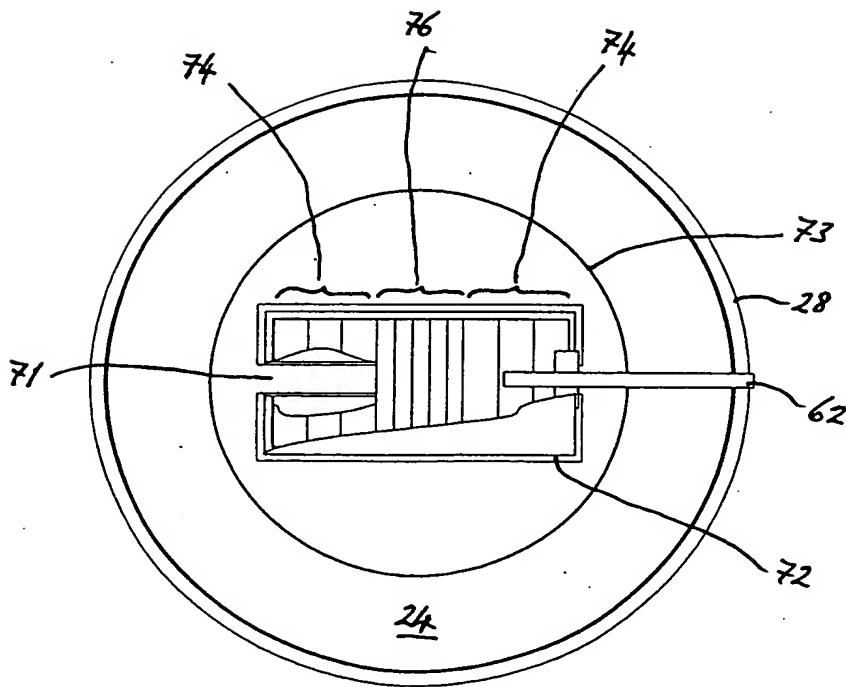


Figure 11

11/11

2-2 TO BE ALIGNED

Movement of dielectric
slab

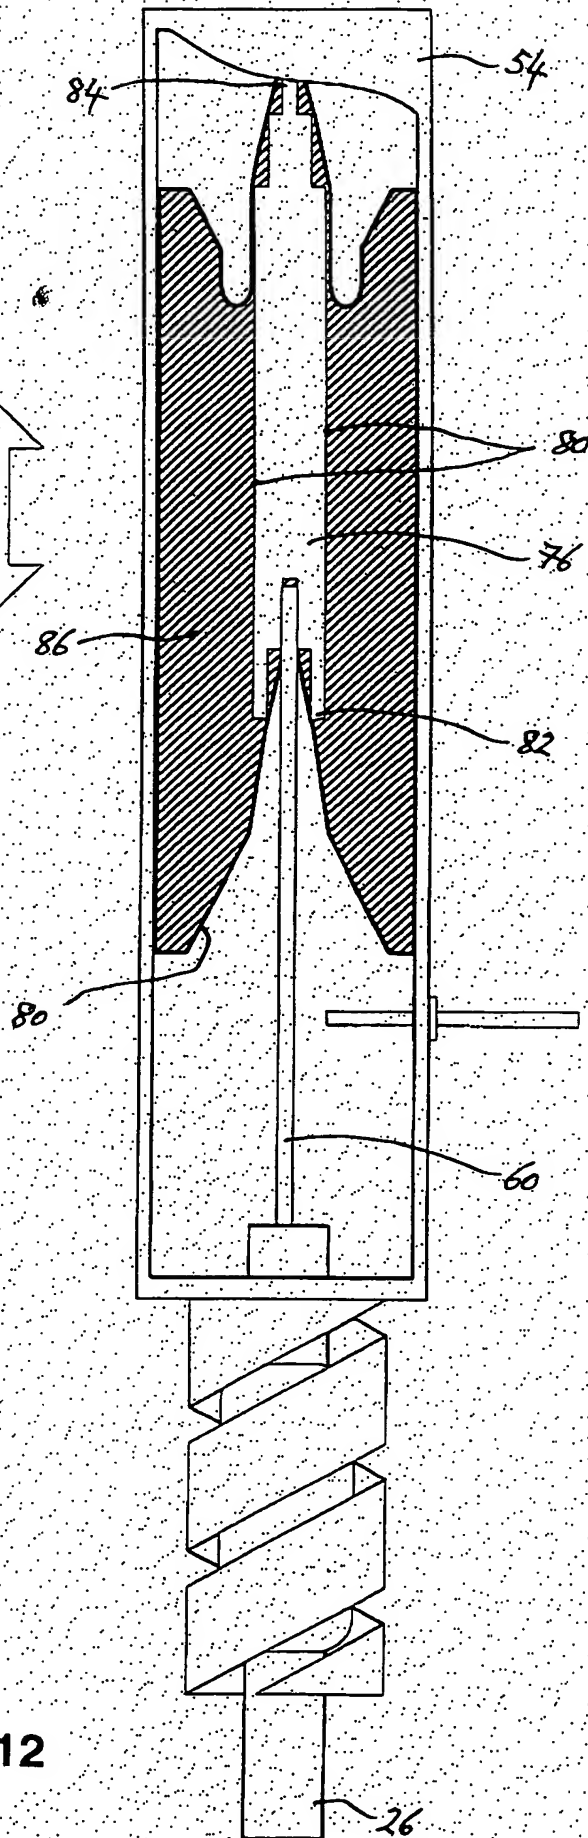


Figure 12